



9 4 J A C K S O N R O A D , S U I T E 1 1 0 , D E V E N S , M A 0 1 4 3 4

ADAPTORS


Model RMAD.BS.SMABNCff4HF

Between Series – SMA female to BNC female 4-hole flange

Frequency (GHz)	Impedance (Ω)	VSWR (max)	Insertion Loss (dB f=frequency GHz)
DC – 4	50	$1.05 + 0.005 f$ (GHz)	$0.07 f^{1/2}$

Notes:

- a. Material:
 - Body: brass/nickel
 - Socket Contacts: BeCu/gold
 - Insulation: PTFE
 - Gasket: Silicon
- b. Operation temperature: -65C to +105C deg

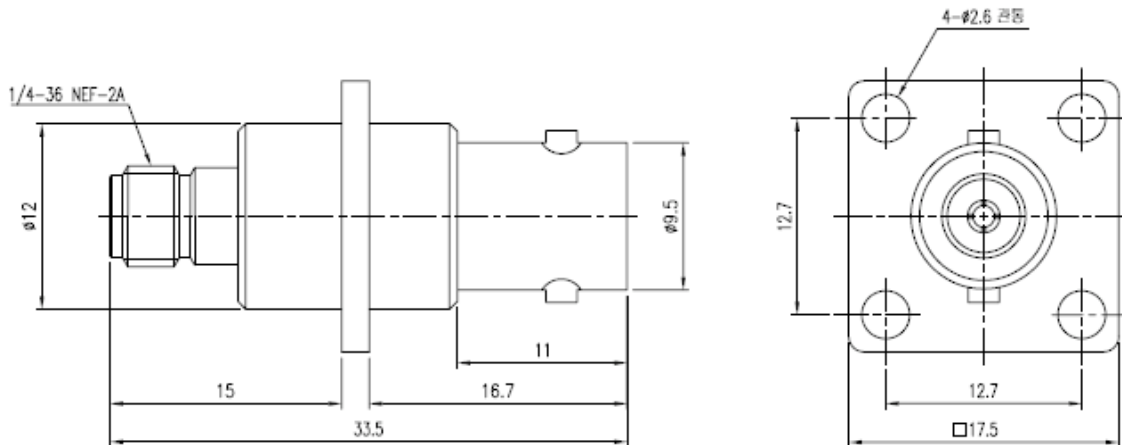

Telephone: 978-772-3767
772-3768

Fax: 978-

www.responsemicrowave.com