



94 Jackson Road, Devens, MA . 01434-4012


ADAPTORS

Model RMAD.IS.SMASMAPfmL **In Series – SMA Quick Connect**
SMA female/ push-on SMA male (limited detent)

Frequency (GHz)	Impedance (Ω)	VSWR (max)	Insertion Loss (dB f=frequency GHz)
DC – 27	50	DC-18Ghz - 1.10:1 max 18-27GHz – 1.20:1 max	0.035 f $\frac{1}{2}$

Notes:

- Material:
 Body: Stainless Steel 303/passivated
 Socket Contacts: BeCu/gold
- Operation temperature: -60C to +165C deg
- Interface: SMA per MIL-STD-348A
- Durability: > 2000 cycles

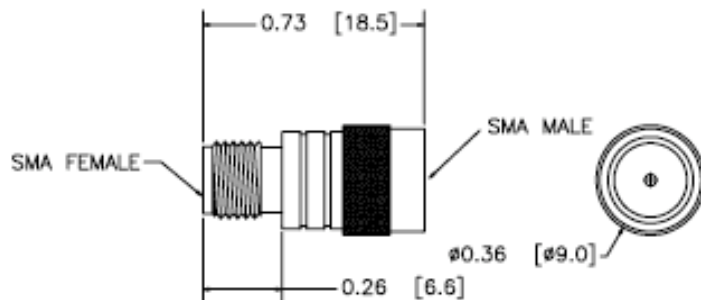

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com