



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

## ADAPTORS


Model RMAD.IS.SMAff

In Series – SMA female/female bullet

Frequency (GHz)	Impedance ( $\Omega$ )	VSWR (max)	Insertion Loss (dB f=frequency GHz)
DC – 18	50	$1.05 + 0.005 f$ (GHz)	$0.07 f^{1/2}$

### Notes:

- Material:  
Body: stainless steel/gold  
Socket Contacts: BeCu/gold
- Operation temperature: -65C to +105C deg
- Interface: SMA per MIL-C-83517 & IEC169-15

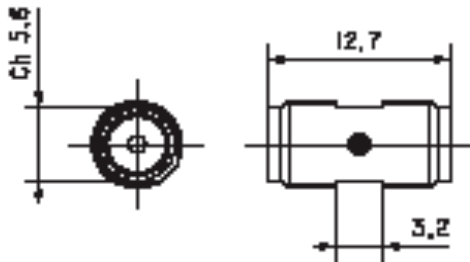

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)