



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

## Coaxial Attenuator


Model RMAT6.3000Nmf75

Fixed Attenuator Type N

FREQUENCY (MHz)	ATTENUATION (dB max)	POWER (Watt) (avg/pk)	IMPEDANCE ( $\Omega$ )	VSWR (max)	INSERTION LOSS (dB max)	FLATNESS (dB max)
DC – 3000	5.7+/-0.15	.5 / 1	75	1.50 : 1	0.5	0.5

### Notes:

- Connector: N male/female
- Operation temperature: -55C to +85C deg
- Case material: brass/nickel

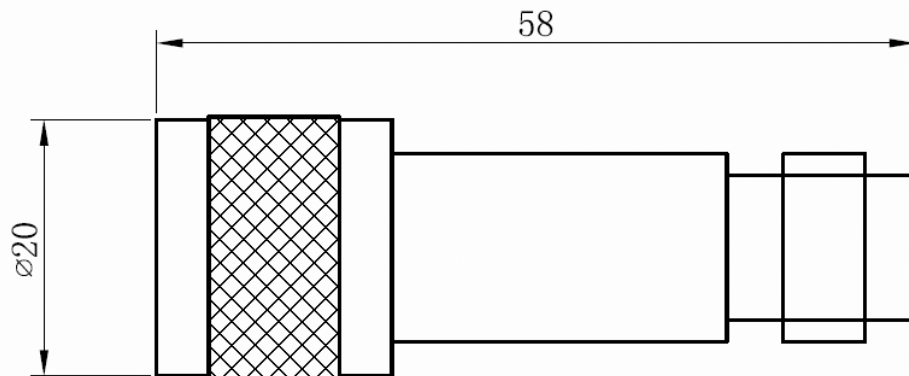

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978.772.3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)

Rev 08/06/12