



94 JACKSON ROAD, SUITE 110 DEVENS, MA 01451

Isolators / Circulators


Model RMCI.1900-2200Sf

20dB Circulator SMA female

Frequency (MHz)	Forward Insertion Loss (dB max)	Reverse Isolation (dB min)	VSWR (max)	Forward Power (Watt)
1900 - 2200	0.4	20	1.25 : 1	100

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female
- Case material: Aluminum alloy
- Operation temperature: -40C to +85C deg

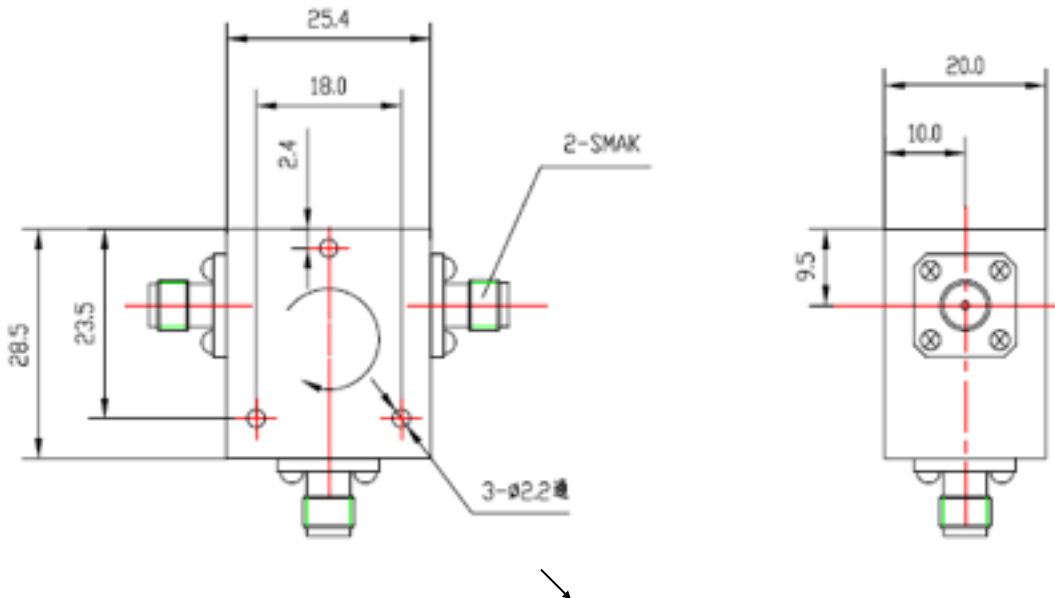

All specifications are subject to change without notice.

Telephone: 978.772.3767

Fax: 978.772.3768

www.responsemicrowave.com