



94 JACKSON RD, SUITE 110, DEVENS, MA 01434

## Isolators / Circulators


Model RMC1.600-800Sf

Circulator SMA female

Frequency (MHz)	Insertion Loss (dB max)	Isolation (dB min)	VSWR (max)
600 - 800	0.5	20	1.30 : 1

### Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 3 places
- Power: forward 100w, reverse 10W
- Case material: Aluminum alloy with Nickel-plating
- Operation temperature: -20C to +85C deg
- Mounting holes: 4 x 3.0mmOD thru

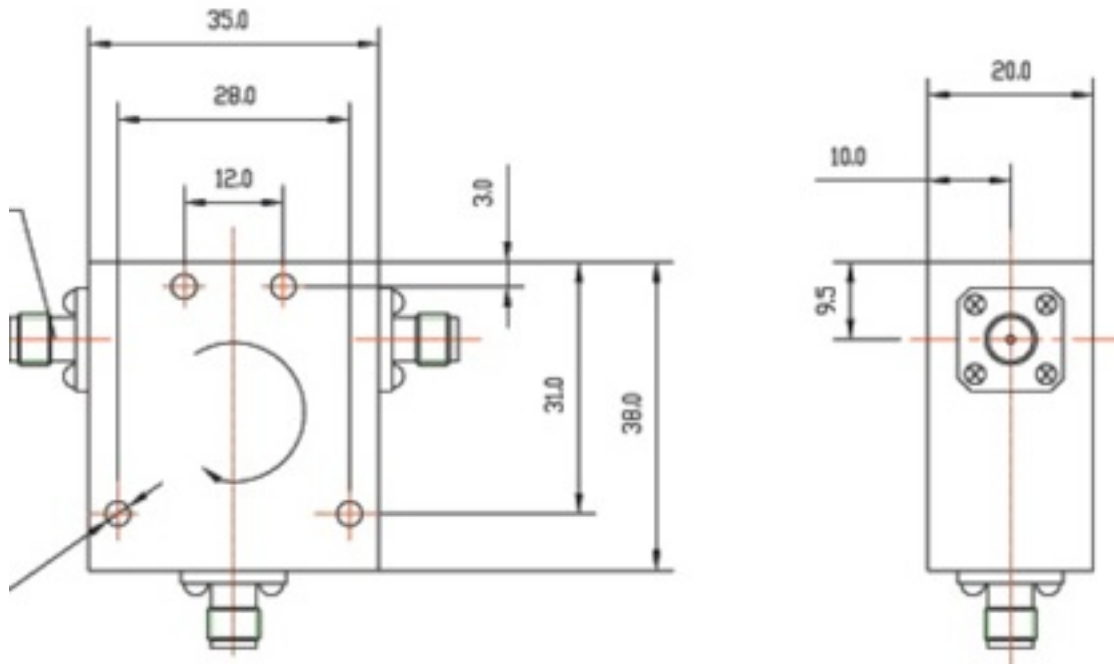

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)