



94 JACKSON RD, SUITE 110, DEVENS, MA 01434

## Isolators / Circulators


Model RMIS.5800-6800Sf

Isolator SMA female

Frequency (MHz)	Insertion Loss (dB max)	Isolation (dB min)	VSWR (max)
5800 - 6800	0.4	20	1.25 : 1

### Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 2 places
- Power: 30w forward, 10w reverse
- Case material: Aluminum alloy with Nickel-plating
- Operation temperature: -40C to +85C deg
- Mounting holes – (2) 2.2mm

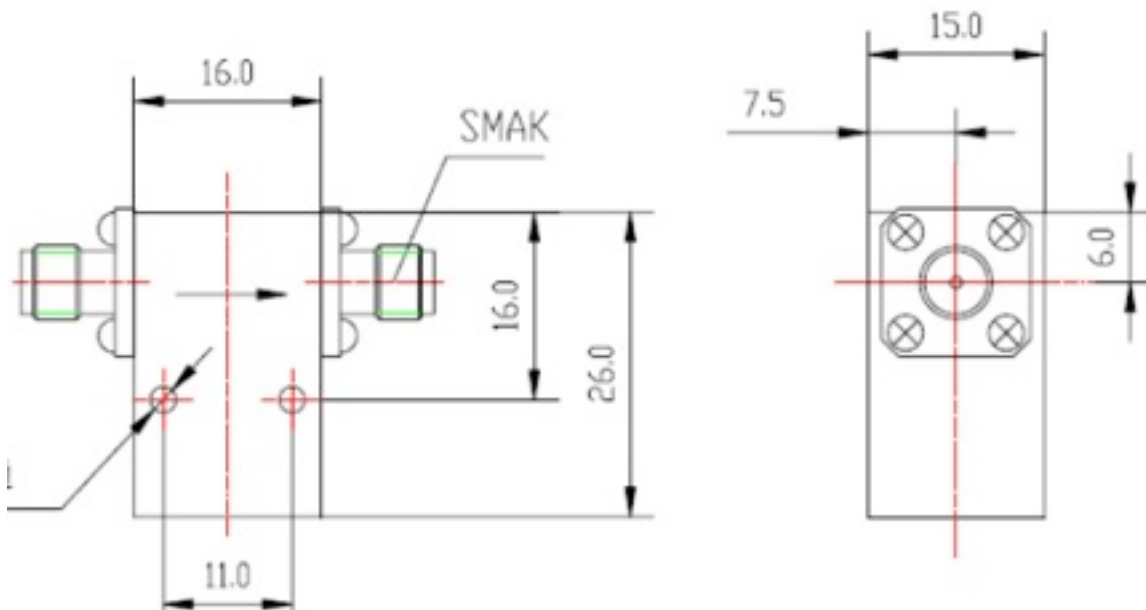

*Preliminary - All specifications are subject to change without notice.*

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)