



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

## Power Divider / Splitters


Model RMPD2.2500Sf

2 way Power Divider SMA female

Frequency (MHz)	Insertion Loss (dB) typ/max	Isolation (dB) typ/min	VSWR (typ/max)	Phase Balance (°)	Amplitude Balance (dB)
800 - 2500	0.25/0.6	25/19	1.10:1/1.5:1	2	0.2

### Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female, (options: N, BNC, TNC & Reverse Polarity versions)
- Output Power:  $\leq 1$  W
- Case material: Aluminum alloy with Nickel-plating, logo/date code laser engraved.
- Operation temperature: -35C to +85C deg

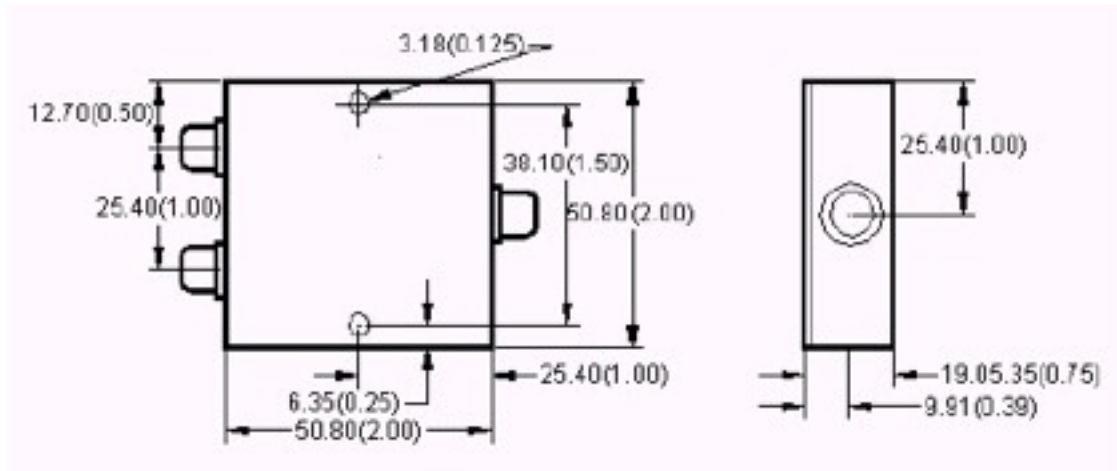

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)