



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider


Model RMPD2..7185NfWP

2-Way, N female

Frequency (MHz)	Insertion Loss (dB max)	Isolation (dB min)	VSWR (max)	Phase Balance (°) max	Amplitude Balance (dB) max
7100 - 8500	1	20	1.5:1	3	0.4

Notes:

- Input and output impedance: 50 Ohms
- Connector: N female
- Power: Forward $\leq 15W$ Reverse: $\leq 1W$
- Case material: Aluminum alloy with Nickel Plating, logo/date code laser engraved.
- Operation temperature: -35C to +80C deg
- Waterproof version - sealed cover

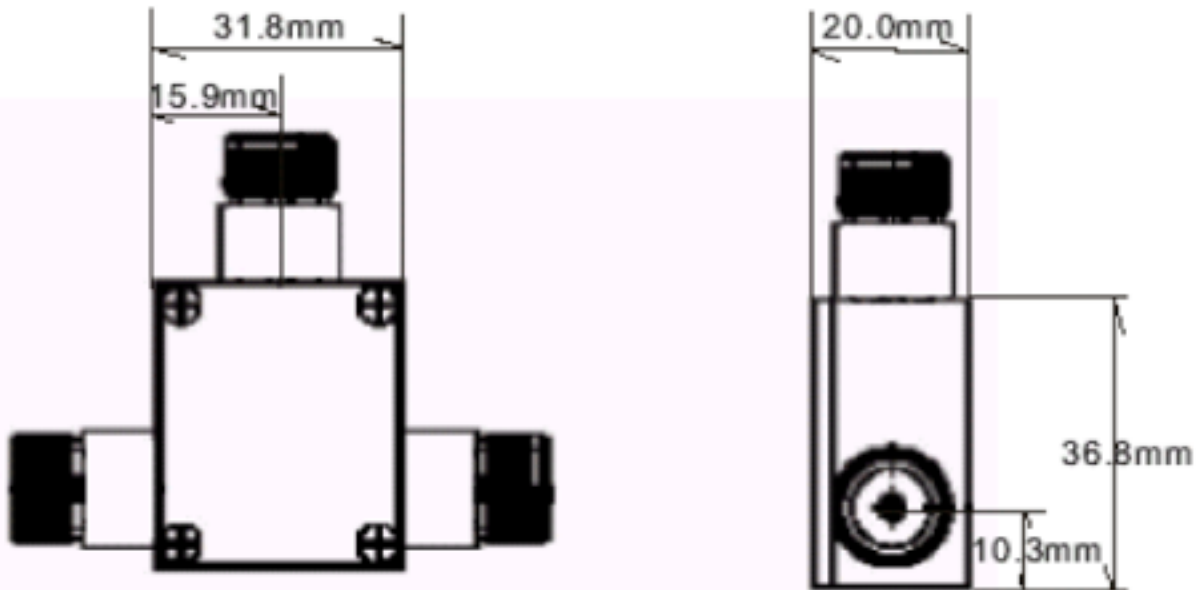

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com