



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Divider / Splitters


Model RMPD4.300Sf

4 way Power Divider SMA female

Frequency (MHz)	Insertion Loss (dB typ/max)			Isolation (dB typ/min)			VSWR (typ/max)	Phase Balance (°) Max			Amplitude Balance (dB) Max		
	L	M	U	L	M	U		L	M	U	L	M	U
	10 - 300	0.5/0.8	0.6/0.9	0.9/1.2	30/25	30/25		25/20	1.2/1.4	3	4	6	0.15

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female, (options: N, BNC, TNC & Reverse Polarity versions)
- Output Power: ≤ 1 W
- Case material: Aluminum alloy with Nickel-plating, logo/date code laser engraved.
- Operation temperature: -35C to +85C deg

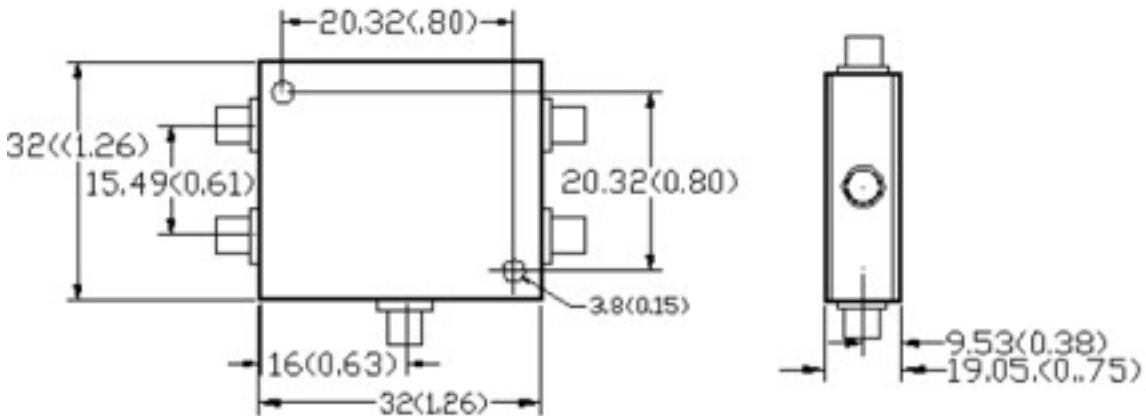

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com