



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider


Model RMPD4.7-11Sf

4-Way, 0° SMA female

| Frequency (MHz) | Insertion Loss (dB typ) | Isolation (dB typ) | VSWR (max) | Phase Balance (° max) | Amplitude Balance (dB max) |
|-----------------|-------------------------|--------------------|------------|-----------------------|----------------------------|
| 7000 - 11000 | 0.8 | 20 | 1.4:1 | 4 | 0.2 |

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 5 places
- Power: Forward 30 W
- Case material: Aluminum alloy with golden iridite plate
- Operation temperature: -55C to +85C deg

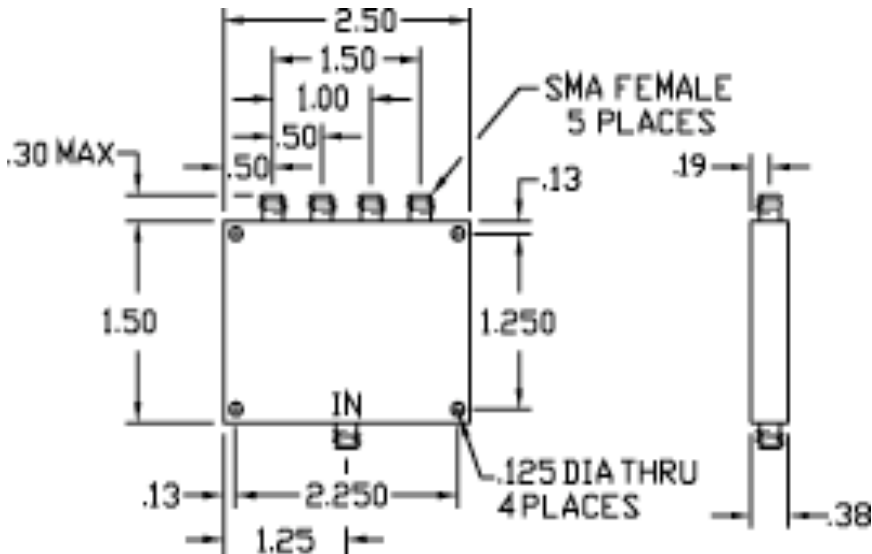

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com