



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider


Model RMPD8.6-18Sf

8-Way, 0° SMA female

Frequency (MHz)	Insertion Loss (dB max)	Isolation (dB min)	VSWR (max)	Phase Balance (° max)	Amplitude Balance (dB max)
6000 - 18000	1.5	16	1.7:1	5	0.5

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 9 places
- Power: Forward 30 W
- Case material: Aluminum alloy with golden iridite plate
- Operation temperature: -55C to +85C deg

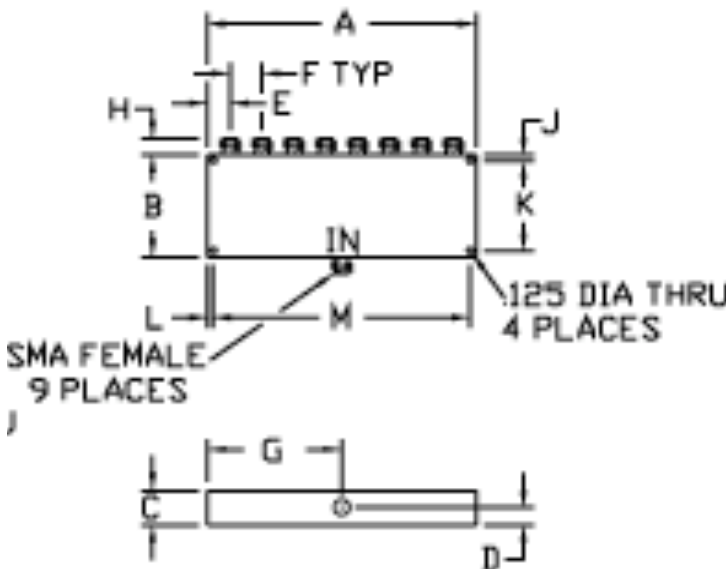

MECHANICAL DIMENSIONS

A = 4.70" J = 1.00"
 B = 2.00" K = n/a
 C = 0.50" L = 0.10"
 D = 0.25" M = 4.50"
 E = 0.25"
 F = 0.60"
 G = 2.35"
 H = 0.30"

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com