



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Electromechanical Phase Shifter


Model RMPS.18000Sf

SMA female

Frequency Range (MHz) FL-FU	Insertion Loss (dB max)	Impedance	VSWR (max)	Phase Variation (deg/GHz)
DC-18000	0.25	50 Ω	≤ 1.15:1	53

Notes:

- Connector: SMA female
- Operation temperature: -40C to +105C deg
- Case material: aluminum w/golden iridite

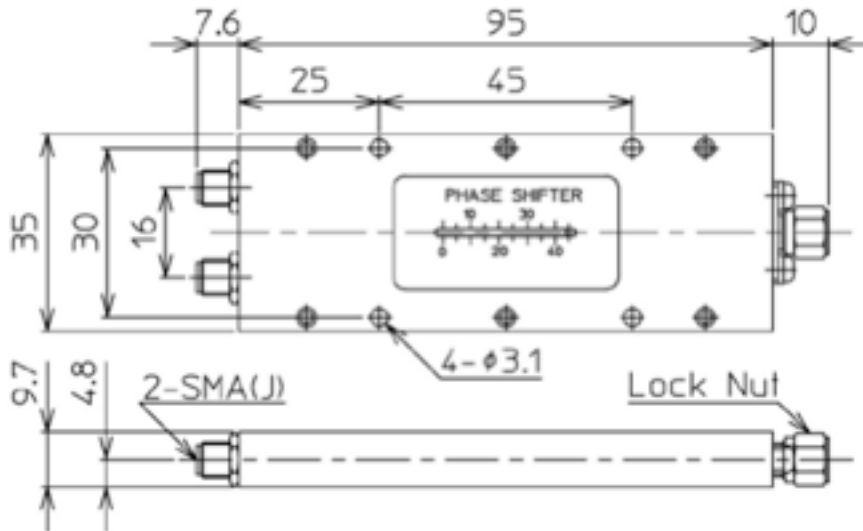

All specifications are subject to change without notice.

Dimensions: mm

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev04/02/12