



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Surge Protector


Model RMSP.2500Nmf

GDT Arrestor

Frequency (MHz)	Throughput (kv/ka)	VSWR (max)	Insertion Loss (dB min)	Impedance (Ω)	Power (W peak)	Surge Current (kA)
DC-2500	6/10	1.2:1	0.2	50	250	10 (8x20us)

Notes:

- Connector: N male/female, (options: 7/16 & SMA versions)
- Material:
 Body: Brass with silver plating
 Center conductor: brass/beryllium with silver plating
- Operation temperature: -35C to +85C deg

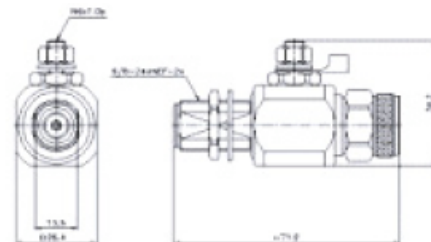

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com