



9 4 J A C K S O N R O A D , S U I T E 1 1 0 , D E V E N S , M A 0 1 4 3 4

TERMINATIONS


Model RMTE.18000Sm1

SMA male, Screw-on

FREQUENCY (MHz)	POWER (WATT)(max)	IMPEDANCE (Ω)	VSWR (max)
DC-18000	1	50	1.20:1

Notes:

- Case Materials/Plating:
Housing: Stainless steel/ passivate
Center Contact: Gold plated BeCu
Resistive element: Thin film
Resistor substrate: Alumina
- Operation temperature: -55C to +150C
- C suffix = 2" bead chain and eyelet

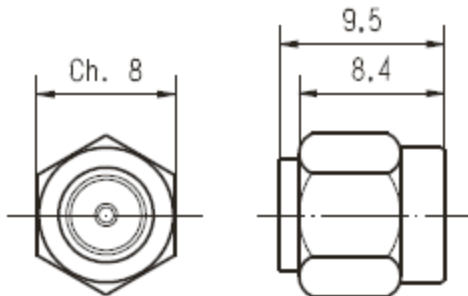

All specifications are subject to change without notice.

Telephone: 978-772-3767
772-3768

Fax: 978-

www.responsemicrowave.com