



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.SMA27ff4HFa

In Series – SMA f/f 4HF

Frequency	Insertion Loss	Impedance	VSWR
DC – 27GHz	0.035 f ½ dB	50ohms	1.15:1 max

Notes:

- a. Material:
 Body: SUS303/passivated
 Socket Contacts: BeCu/gold
- b. Operation temperature: -60C to +165C deg
- c. Interface: SMA per MIL-STD-348A
- d. Durability: 500 mating cycles

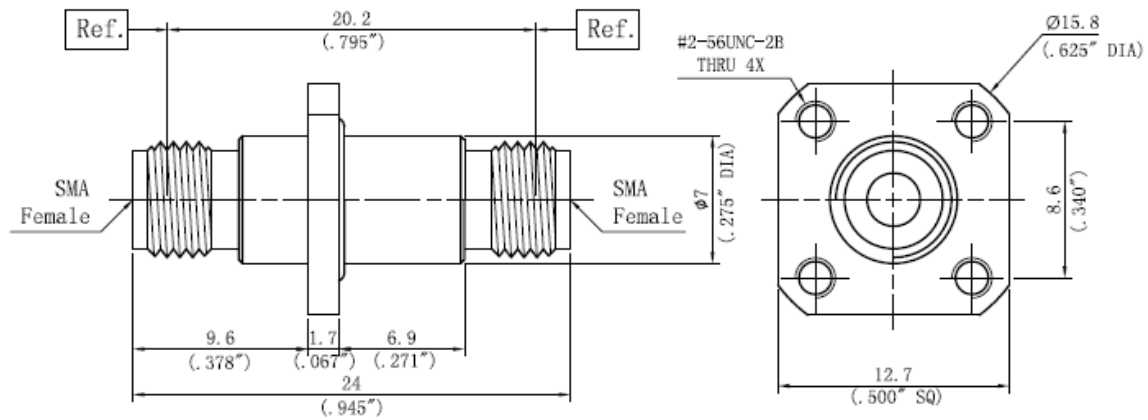

All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com