



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.SMA27ffBHa

In Series – SMA female/female

Frequency	Insertion Loss	Impedance	VSWR
DC – 27GHz	0.07 f 1/2 dB <i>f=frequency GHz</i>	50ohms	1.15:1 max

Notes:

- a. Material:
 - Body: stainless steel/passivate
 - Socket Contacts: BeCu/gold
- b. Operation temperature: -65C to +105C deg
- c. Interface: SMA per MIL-C-83517 & IEC169-15

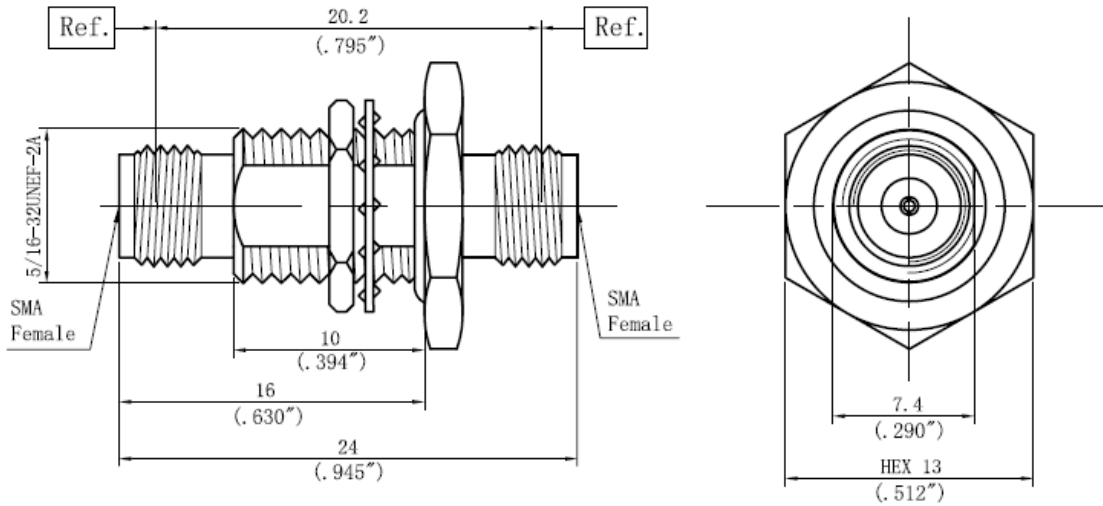

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com