



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

COAXIAL ATTENUATOR


Model RMAT1.5.3000SMAmf

Fixed Attenuator Type SMA

Frequency (GHz)	Attenuation (dB max)	Power (avg/pk) (Watt)	Impedance (Ω)	VWSR (max)
DC - 3	1.5 +/- 0.5	1 / 2	50	1.15 : 1

Notes:

- a. incremental values available upon request. Adjust P/N by changing value; "RMA_{Txx}.3000"
- b. Operation temperature: -55C to +125C deg
- c. Case material: Brass with gold plating or SS passivate

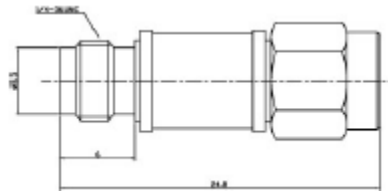

All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com