



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434


Coaxial Attenuator

Model RMA_Txx.18000Nmf

Fixed Attenuator

FREQUENCY (MHz)	ATTENUATION (dB max)	POWER (Watt) (avg/pk)	IMPEDANCE (Ω)	VSWR (max)
DC – 18000	1-6 +/-0.5 7-20 +/- 0.75 21-30 +/- 1.0	10 / 100 5 W max	50	1.50 : 1 1.25 : 1 typical

- Connector: N male/female
- Operation temperature: -55C to +125C deg
- Material:
 - Connectors: Stainless steel/ passivate
 - Heat Sink: Black anodized aluminum
 - Center Conductor: Gold plated BeCU
 - Insulator: PTFE
- Insert desired attenuation value at "xx" in P/N

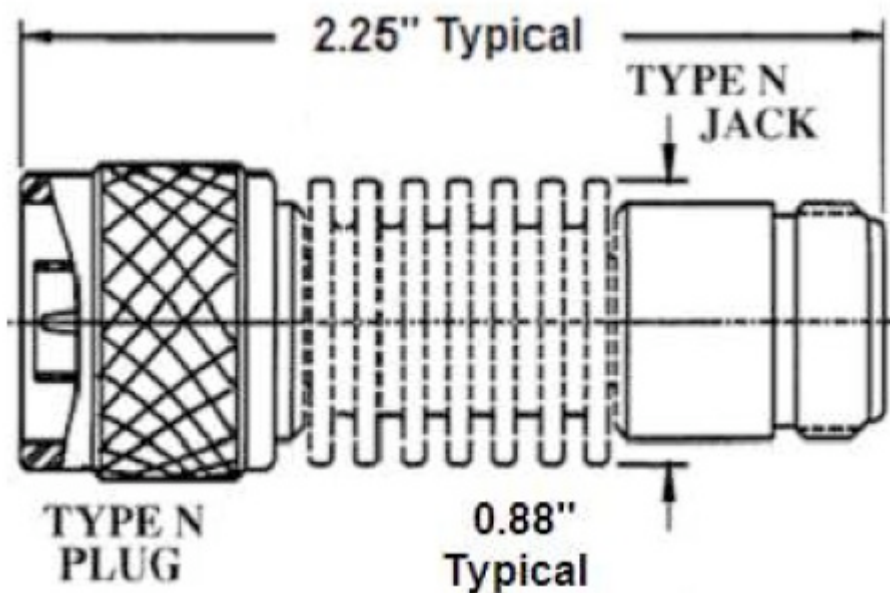

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

All specifications are subject to change without notice.

Dimensions: inches

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 8/06/12