



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators


Model RMIS.7700-8500Sf

Isolator, SMA female

Frequency	Insertion Loss	Isolation	VSWR
7.7-8.5 GHz	0.4dB max	20dB min	1.25:1 max

Notes:

- Input and output impedance: 50 Ohms
- Power, 50W forward, 10W reverse
- Connector: SMA female 2 places
- Case material: Aluminum alloy
- Operation temperature: -30C to +60C deg

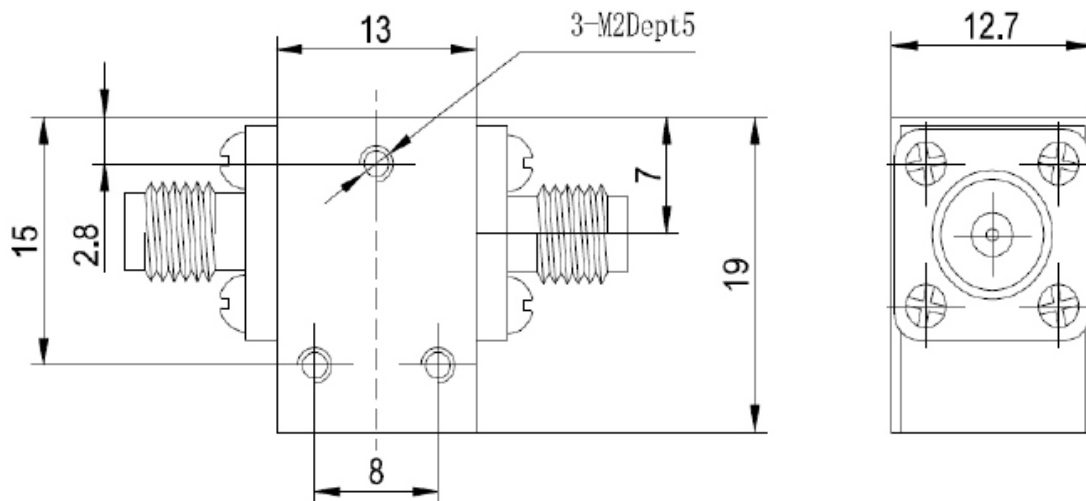

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com