



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

## Power Combiner/Divider


Model RMPD2.05-18Sf

2-Way, Broadband

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
0.5–18GHz	0.5dB max	+/-5° max	1.5:1 max	2.0dB max	15dB min

**Notes:**

- a. Input and output impedance: 50 Ohms
- b. Connector: SMA female 3 places, SS/P
- c. Power: Forward 10W CW Reverse 0.5W CW
- d. Case material: Aluminum alloy w/black paint
- e. Operation temperature: -55°C to +85°C deg

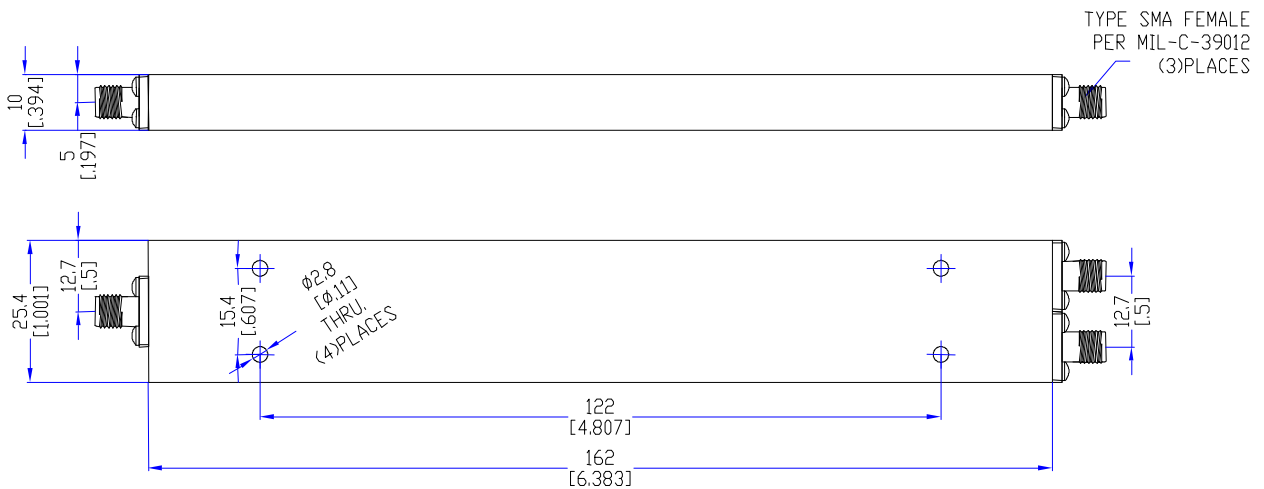

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)