



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD4.4000-8000Sf


4-Way, 0° SMA female

| Frequency | Amplitude Unbalance | Phase Unbalance | VSWR | Insertion Loss | Isolation |
|-----------|---------------------|-----------------|------------|----------------|-----------|
| 4 – 8 GHz | 0.3dB max | +/- 3° max | 1.30:1 typ | 0.8dB max | 20dB min |

Notes:

- a. Input and output impedance: 50 Ohms
- b. Connector: SMA female 5 places stainless/passivate
- c. Power: Forward 30 W CW Reverse: 1 W
- d. Case material: Aluminum alloy w/black paint finish
- e. Operation temperature: -55°C to +85°C

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196,EPA3052&AAS,EN1122: 2001&AAS, EPA3540C&GC-MS

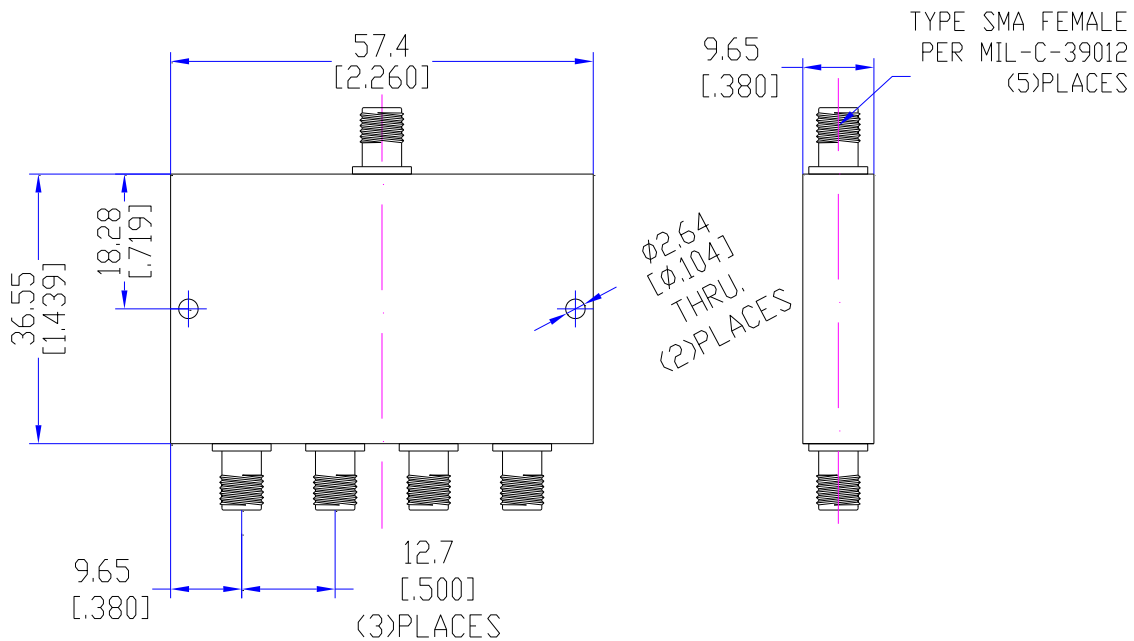

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com