



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

TERMINATIONS



Model RMTE.3000.Nm250

N male

Frequency	Power Nominal	Power Peak	Impedance	VSWR
DC-3000MHz	250 watts*	1Kw/50us	50Ω	1.20:1 max

Notes:

- a. Case Materials/Plating:
 Housing: Brass/nickel
 Fins: aluminum/black anodized
 Center Contact: Gold plated brass per MIL-G-45204
 Resistive element: Thin film
 Resistor substrate: Alumina
- b. Operation temperature: -55°C to +85°C
- c. *Power is ambient and derated linearly to 1W @ 125°C

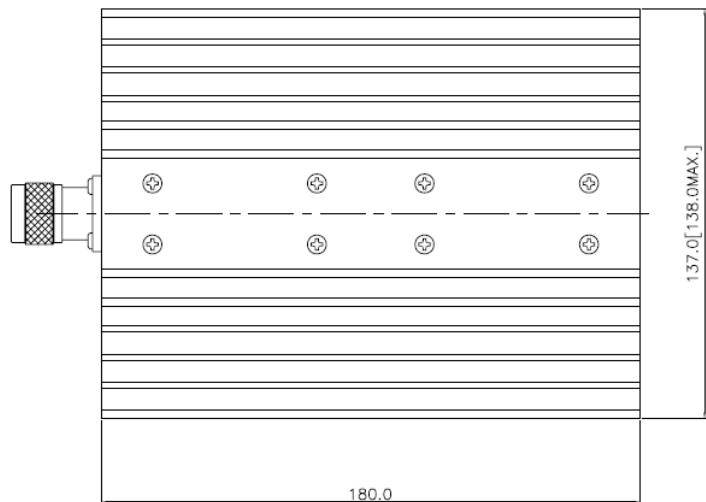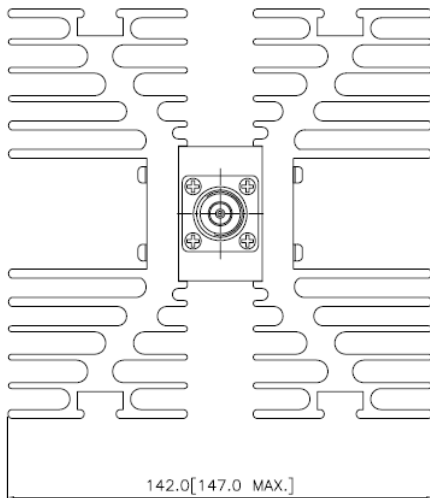

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com