

94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS

Model RMAD.BS.SMABNCfm Between Series – SMA female to BNC male

Frequency	Impedance	VSWR	Insertion Loss
(GHz)	(Ω)	(max)	(dB min)
DC - 3	50	1.20:1	0.5


Notes:

a. Material:

Body: brass/nickel Contacts: BeCu/gold Dielectric: PTFE Gasket: silicon

b. Operation temperature: -55C to +85C deg

c. RoHS Complaint

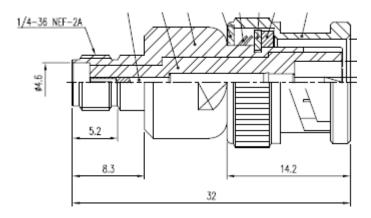

All specifications are subject to change without notice.

Telephone: 978-772-3767 Fax: 978-772-3768

www.responsemicrowave.com