



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

## COAXIAL ATTENUATOR


Model RMAT1.3000Nmf

Fixed Attenuator Type N

Frequency (GHz)	Attenuation (dB max)	Power (avg/pk) (Watt)	Impedance ( $\Omega$ )	VWSR (max)
DC - 3	1 +/- 0.6	5 / 10	50	1.2 : 1

**Notes:**

- a. incremental values available upon request. Adjust P/N by changing value; "RMA<sub>Txx</sub>.3000"
- b. Operation temperature: -55C to +125C deg
- c. Case material: Brass with gold plating or SS passivate

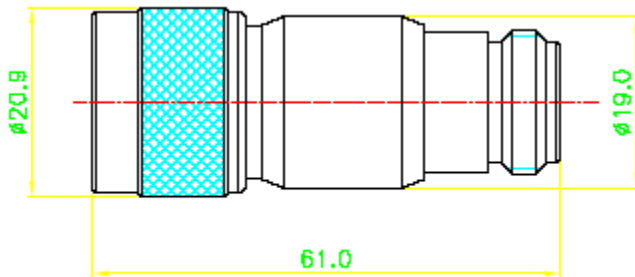

*All specifications subject to change*

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)